

# CRMPL 201

## Specifications

FRAME LENGTH	5600MM
FRAME WIDTH	2112MM
FRAME HEIGHT	300-1080MM
MAX PUSH POWER FOR PULLING TOWER	95KN
RATED VOLTAGE	220/380V
WORKING RANGE OF PULLING TOWER	360°
MAX LOAD BEARING	3500KG




Main anchoring system for fast clamping



Convenient and easy way to drive cars on




Free moving mechanism of pulling tower




Clamps for options



Air Jack for second lifting

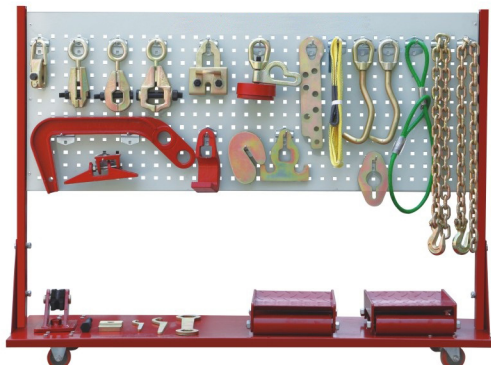

Accessories and tools for body collision repair (as per configuration)

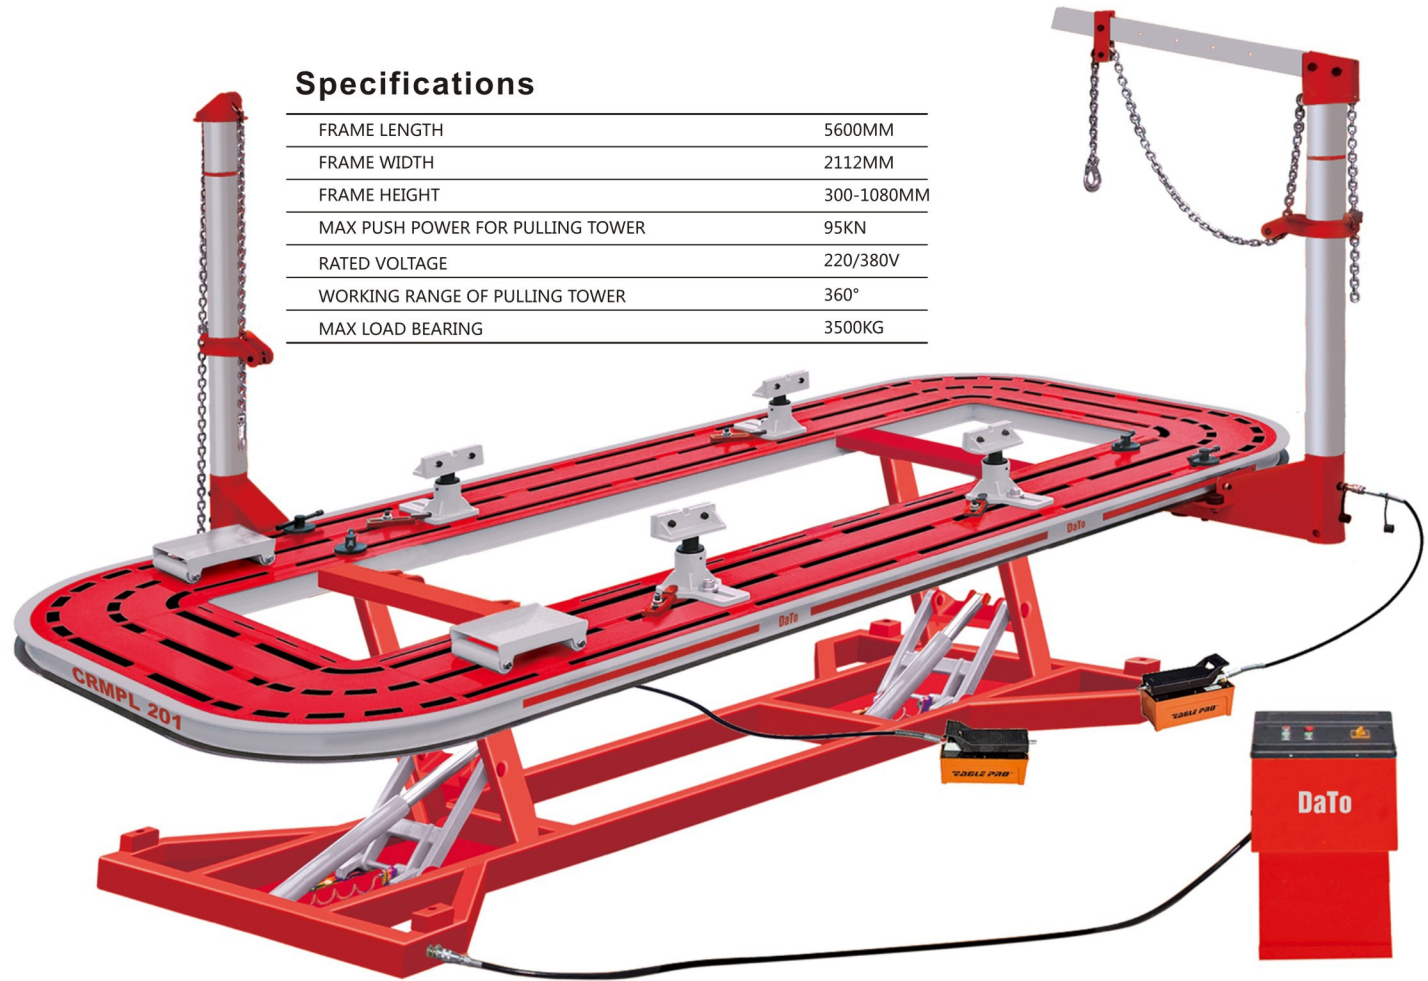

- ◎ Self-locking vertical hydraulic lifting platform, according to the requirement in the 300-1080mm highly adapt platform, equipped with the hydraulic lifting and mechanical self-locking double insurance.
- ◎Tilt hydraulic lifting platform assembled with light and flexible support leg , make the car drive on and off more conveniently.
- ◎Flat plate and square hole working platform with five rows square holes, assembled by the large cutting CNC equipment , the high intensity. No work blind spot, quick stretching.
- ◎ 360-degree spiral and unique wheel rotation makes pulling towers move stable and flexible.
- ◎Unique spiral movement design of main clamps. Keep the jaw flat and turn the pole upper or lower to change the height. Applying to adjust vehicles with different chassis.
- ◎Unique adjustment design of main clamp jaw, fixed by only two screws. Thimble jaw, clamp vehicles firmly and quickly with high efficiency.
- ◎Mechanical streamline design tools, forge and heat treatment proess, long service life and high-intensity, almost considerate all deformation correction.
- ◎Retractable wheelbase coordinates measuring (PTP), the most advanced measuring system, no interrupted point, operated conveniently, laser carved scale, durable.
- ◎Hydraulic pumps customized according to repair enviroment, power is strong and durable. convenient, quick, abundant, low repair cost.