

TCL2413RG - TYRE CHANGER

Model No : **TCL2413RG**



Tilting arm




Quick air booster tank


Independent 006 Help Arm
3 auxiliary functions for mounting/demounting tyres.

- Full automatic pneumatic tilting column
- Vertical arm positioning automatically and synchronous pneumatic locked at any optional position.
- Clamping jaws are totally one step die casting
- Quick air boosters, esp, suitable for low profile tyres

Rim Clamping Method

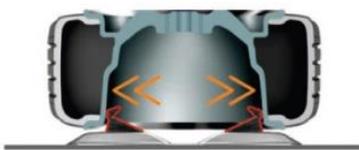

Inside clamping
12~24"

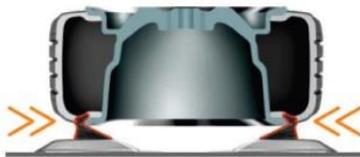

Outside clamping
10~21"

Tyre Dimension



Specifications

Working Pressure	8-10bar (116-145 psi)
Optional Power Supply	110V(1ph) / 220V(1/3ph) / 380V(3ph)
Optional Motor Supply	0.55/0.75/1.1 KW
Dimension (006 Help Arm)	1230*450*350mm (4.0*1.5*1.1 ft)
N/G Weight (Main Body)	229/255kg (504/561 lbs)
N/G Weight (006 Help Arm)	66/77 kg (145/169 lbs)
N/G Weight (Total)	295/332kg (649/731 lbs)

