DRS 1101
RIM STRAIGHTENING MACHINE

The wheel rim straightening machine is equipped with:

- Working end caps of various shapes suitable for different rim deformations.
- A set of centering rings for wheel rims of different central opening diameters.
- Deformation positioning device.
- Mounting plate with adjustable set screws
- Preliminary straightening lever.

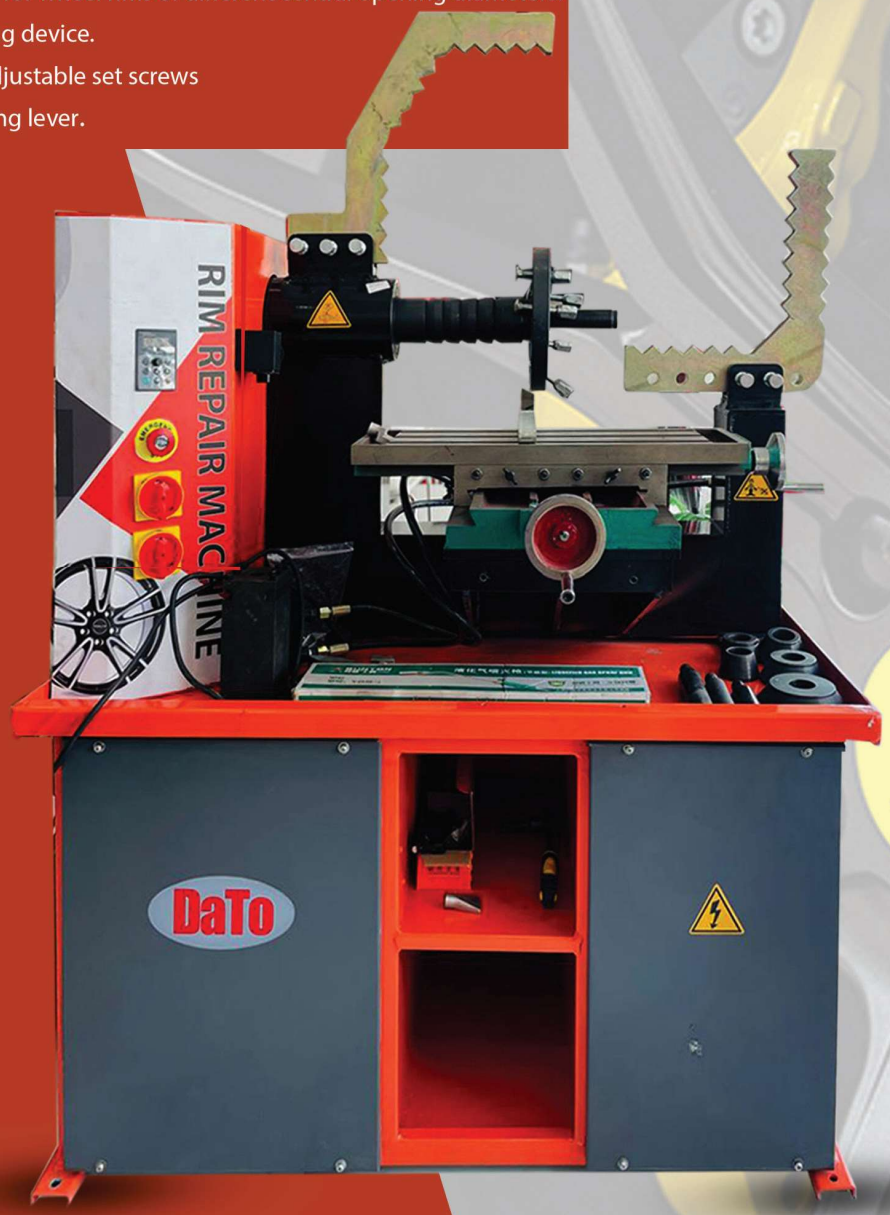

Specification

Parameters	DRS 1101
Input power	AC400V±10%~50Hz
Wheel Rim diameter	13″ – 30″
Drive motor power	0.55 KW
Hydraulic Pump motor Power	0.55 KW
Straightening cylinder force	45 KN
Max Hydraulic pump pressure	200 Bar
Noise level	75 dB
Weight	450 Kg

Wheel Rim Straightening Machine for steel and aluminum wheel rims 13"-30". A wheel rim is repaired by means of a hydraulic cylinder supplied with suitable working end caps of various shapes. Fixing disc with 6 holes and centering ring provide secure rim fixing independently on rim's holes number.

Art No : DRS1011 : 005877