

"The Legendary leader of Automotive Equipments"

LIFT - SECTION

LJP4104 / 4105 - FOUR POST LIFT

The Four Post lifts are most suited for Quick Oil Change as well as the most economic and professional lifting facilityavailable for the Alignment. Equipped with along ramp for low profile vehicles, the DaTo 4 post lift seems to be the wise choice for any class of Service Center

Features

- Fully Powder Coated lift.
- Good synchronisation process and precise levelling for alignment.
- Position of turntable can be adjusted for different vehicle types.
- Durable Teflon Balls for Side Slip.
- Additional Safety locking Mechanism.
- Protected to complete operational stability.
- Quick installation possible.
- Low noise operation.
- Long Ramp for low profile vehicles.
- Free standing Design and CE certified.
- Multilocking Position with Pneumatic locks with safety features.



Steel Cable steel cable and locking bar for safe operation



Rolling Jack



Rack Slope Safety Device The integrated slack rope safety device preventsa titled position when lowering the platform





Control Box Control and management of all functions fromone central button



LJP4104 / LJP4105


www.datotech.de



"The Legendary leader of Automotive Equipments"

Specifications

Item	Parameter (LJP4104)		Parameter (LJP4105)	
	For Alignment	For Service	For Alignment	For Service
Drive	Electrical hydraulic		Electrical hydraulic	
Max lifting weight	4000kg		4500kg	
Lifting height	1896mm	1846mm	1896mm	1846mm
Platform initial height	246mm	196mm	246mm	196mm
Platform lengthh	4660mm		5190mm	
Platform width	490mm		490mm	
	<505		<505	
	<60s		<60s	
Power supply	220/380V		220/380V	
Motor power	2.2KW / 3HP		2.2KW / 3HP	
Overall width	3340mm		3340mm	
Overall length	5949mm	5951mm	6288mm	6288mm
Overall weight	1520kg	1270kg	1520kg	1270kg
Air supply	4-6 kg / cm²		4-6 kg / cm²	
Hydraulic oil	18 L 20# high abrasive hydraulic oil		18 L 20# high abrasive hydraulic oil	
Noise level	<76db		<76db	
Installation height	Height above sea level < 1000M		Height above sea level < 1000M	
Installation place	Indoor		Indoor	
Optional	Rolling Jack		Rolling Jack	
Rolling jack lifting weight	2000kg		3000kg	
Rolling jack lifting height	375mm		375mm	

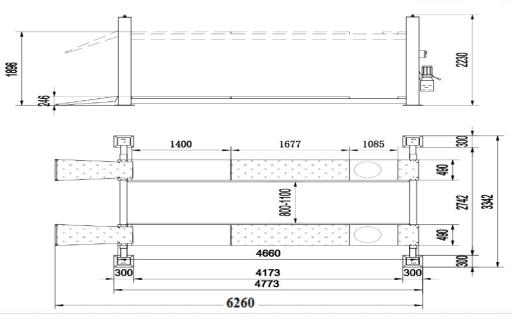

Art No: LJP4104(220V):003977 LJP4104(380V):003976 LJP4105(220V):003979 LJP4105 (380V):003978 LJP4112(380V):004751

www.datotech.de